



LYV

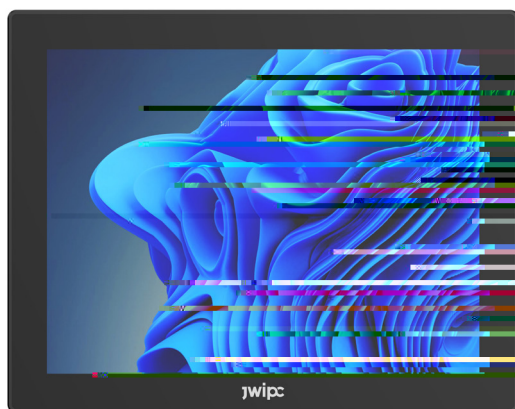

Yhuvl r q#4!3

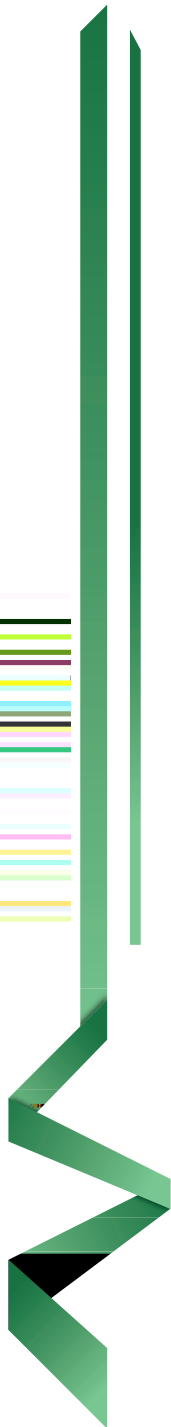

h g h

g h

Hu Hu

g

h

g

h

g

目录

4	#	14
1.1		1
1.2		1
1.2.1		1
1.2.2		2
1.2.3 LCD		2
1.2.4		4
1.2.5		5
1.2.6		6
1.3 I/O		6
1.3.1 I/O		6
1.3.2 / I/O		7
1.4		8
1.4.1 IVS-101		8
1.4.2 IVS-104		9
1.4.3 IVS-121		10
1.4.4 IVS-150		11
1.4.5 IVS-156		12
1.4.6 IVS-170		13

4

414#

IVS h 101 d ~ 215 d h Intel® Elkhart Lake / Alder Lake-U / H110 g

415#

41514#

z##ELRV AMI UEFI BIOS

z## Z#{#K#{#G

- IVS-101 4 275 x 194 x 71mm Ÿ	Hu	h	h	79mm Ÿ
- IVS-104 4 275 x 222 x 71mm Ÿ	Hu	h	h	79mm Ÿ
- IVS-121 4 298.5 x 237.5 x 71mm Ÿ	Hu	h	h	79mm Ÿ
- IVS-150 4 360 x 284 x 71mm Ÿ	Hu	h	h	79mm Ÿ
- IVS-156 4 398.4 x 250.8 x 71mm Ÿ	Hu	h	h	79mm Ÿ
- IVS-170 4 391.4 x 326.4 x 71mm Ÿ	Hu	h	h	79mm Ÿ
- IVS-185 4 470 x 290 x 71mm Ÿ	Hu	h	h	79mm Ÿ
- IVS-215 4 532.5 x 324 x 71mm Ÿ	Hu	h	h	79mm Ÿ

z## #DC 12-36V h / / /

z###YV0437

- 4:3
- 1024 x 768
- 350 cd/m²
- 900:1
- 50000
- 75 () h 75 () h 75 () h 75 ()

z###YV0454

- 4:3
- 1024 x 768
- 500 cd/m²
- 1200:1
- 50000
- 88 () h 88 () h 88 () h 88 ()

z###YV0483

- 4:3
- 1024 x 768
- 350 cd/m²
- 1000:1
- 50000
- 89 () h 89 () h 89 () h 89 ()

z###YV0489

- 16:9
- 1920 x 1080
- 300 cd/m²
- 800:1
- 15000
- 85 () h 85 () h 85 () h 85 ()

z###YV04:3

- 5:4
- 1280x1024
- 250 cd/m²
- 1000:1
- 50000
- 85 () h 85 () h 80 () h 80 ()

z##LYV04;8

- 16:9
- 1920 x 1080
- 250 cd/m2
- 1000:1
- 50000
- 89 () h 89 () h 89 () h 89 ()

z##LYV0548

- 16:9
- 1920x1080
- 250 cd/m2
- 1000:1
- 50000
- 89 () h 89 () h 89 () h 89 ()

4l517#

z##LYV0434

- 10 5 y
- 81% (>80%)
- 5000 1000 y

z##LYV0437

- 10 5 y
- 81% (>80%)
- 5000 1000 y

z##LYV0454

- 10 5 y
- 81% (>80%)
- 5000 1000 y

z##LYV0483

- 10 5 y
- 81% (>80%)
- 5000 1000 y

z##LYV0489

- 10
- 81% (>80%)
- 5000 1000 y

z##LYV04:3

- 10
- 81% (>80%)
- 5000 5 1000 5

z##LYV04;8

- 10
- 81% (>80%)
- 5000 5 1000 5

z##LYV0548

- 10
- 81% (>80%)
- 5000 5 1000 5

41518#

z##LYV04342LYV04372LYV04542LYV0483

- 5 OP 5 h 0 ~ 50 °C 5 32~122 °F 5
h -20 ~ 60 °C 5 -4 ~ 140 °F 5
- 95% @ 40 °C 5 5
- 5 NOP 5 5 -20 ~ 60 °C 5 -4 ~ 140 °F 5
- 5 OP 5 5 15g 11ms
- 5 OP 5 5 5~500Hz 1Grms
- EMC 5 CE Class A
- IP 5 IP65

z##LYV04892LYV04:32LYV04;82LYV0548

- 5 OP 5 5 0 ~ 50 °C 5 32~122 °F 5
- 95% @ 40 °C 5 5
- 5 NOP 5 5 -20 ~ 60 °C 5 -4 ~ 140 °F 5
- 5 OP 5 5 15g 11ms
- 5 OP 5 5 5~500Hz 1Grms
- EMC 5 CE Class A
- IP 5 IP65

41519#

z##Windows 7 Ў ъ

z##Windows 10

z##Windows 11

z##Linux

416#L2R#

416#L4# #L2R#

IVS I/O 11 G



#####

414# #L2R#

A ч B ч


C ч 4 x USB3.0 D ч ATX/AT

E ч 2 x RJ45

F ч 2 x COM ч RS232/422/485

G ч HDMI H ч DC IN

41615# Ш #L2R#
IVS H I/O 1.2 G

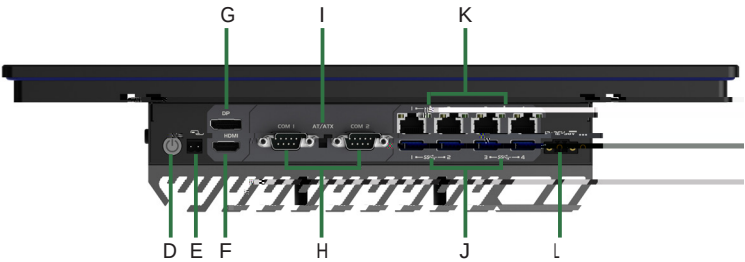

415# Ш #L2R#

- | | |
|---------------|----------------|
| A ч | B ч |
| C ч HDMI | D ч DP |
| E ч 2 x COM h | RS232/422/485 |
| F ч ATX/AT | G ч 4 x USB3.0 |
| H ч 4 x RJ45 | I ч DC IN |

• 9

• 9

• 9

• 9

• 9



• 9

• 9

• 9




41715# YV0437

Z#

Z#{#K#{#G 275 x 222 x 71mm

Z#{#K#{#G $263^{+1.5}_{-0} \times 210^{+1.5}_{-0}$ mm

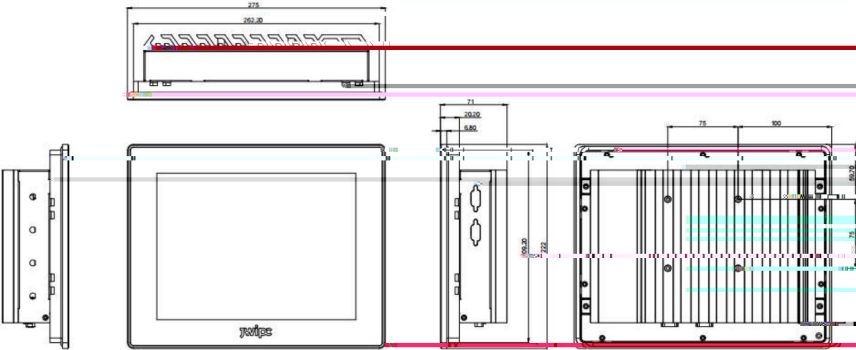


Z#

HU

Z#{#K#{#G 275 x 222 x 79mm

Z#{#K#{#G $263^{+1.5}_{-0} \times 210^{+1.5}_{-0}$ mm

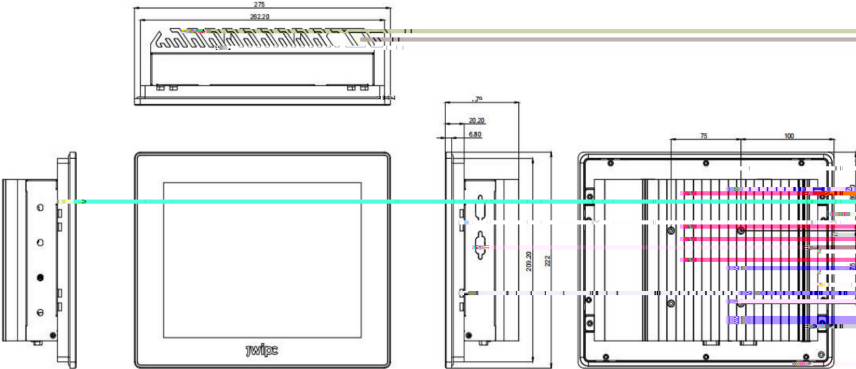

41716# YV0454

Z#

Z#{#K#{#G 298.5 x 237.5 x 71mm

Z#{#K#{#G 286.5^{+1.5}₋₀ x 225.5^{+1.5}₋₀ mm



Z#

Hu

Z#{#K#{#G 298.5 x 237.5 x 79mm

Z#{#K#{#G 286.5^{+1.5}₋₀ x 225.5^{+1.5}₋₀ mm



41717# YV0483

Z#


Z#{#K#{#G 360 x 284 x 71mm
+1.5 +1.5
Z#{#K#{#G 348 x 272 mm
-0 -0



Z#

H

Z#{#K#{#G 360 x 284 x 79mm
+1.5 +1.5
Z#{#K#{#G 348 x 272 mm
-0 -0

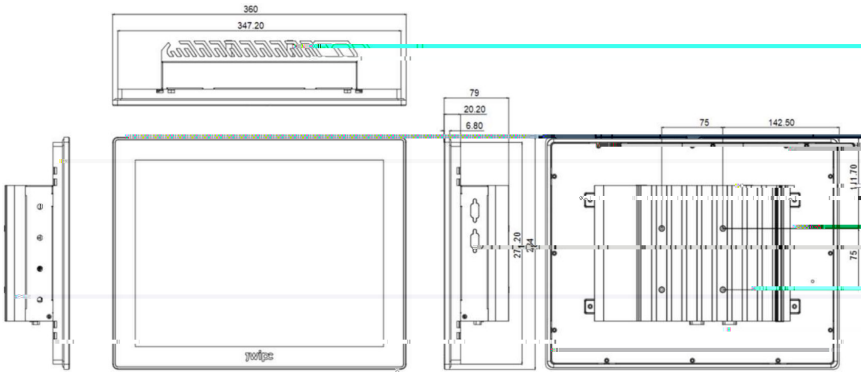

41718#LV0489

Z#


Z# Z#K#G 398.4 x 250.8 x 71mm

Z# Z#K#G 386 x 238.5 m ' 1

4171: #YV04; 8

Z#

Z#{#K#{#G 470 x 290 x 71mm
+1.5 +1.5
Z#{#K#{#G 458 x 278 mm
-0 -0

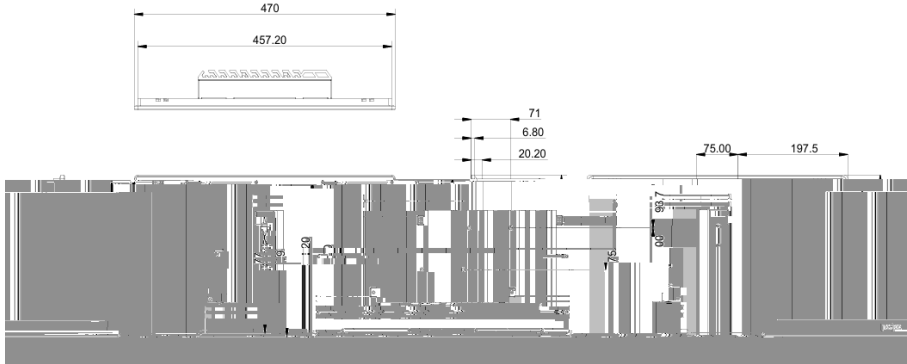

Z#

H

Z#{#K#{#G 470 x 290 x 79mm
+1.5 +1.5
Z#{#K#{#G 458 x 278 mm
-0 -0




4171; #LV0548

Z#

Z#{#K#{#G 532.5 x 324 x 71mm

Z#{#K#{#G 520.5⁺¹⁵₋₀ x 312⁺¹⁵₋₀ mm

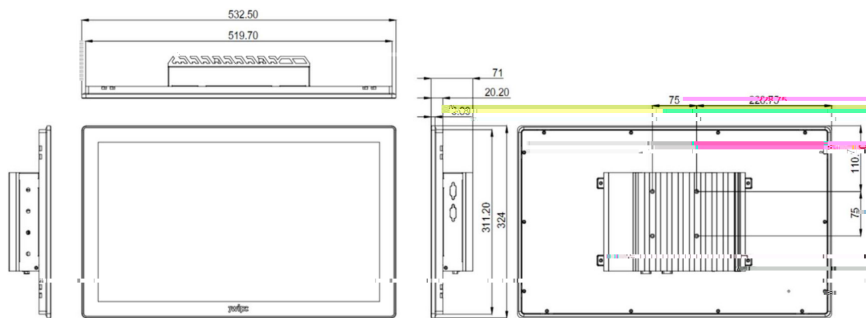


Z#

HU

Z#{#K#{#G 532.5 x 324 x 79mm

Z#{#K#{#G 520.5⁺¹⁵₋₀ x 312⁺¹⁵₋₀ mm

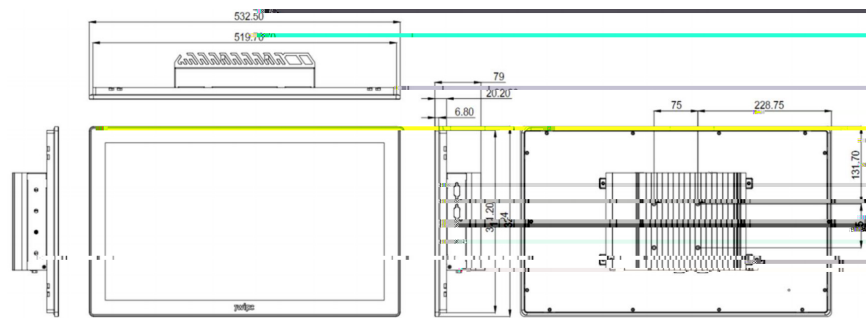

5 #

514#

□ 19"

■

□

■

■ VESA

Ÿ

Ÿ

■

□


515#

5154#

Ÿ 1 Ÿ

h

h




Ÿ 2 Ÿ

ч 5 kgf-cm Ÿ 0.5 Nm Ÿ

h

h

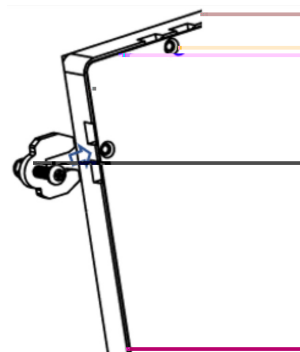


Ÿ3Ÿ

h

g

Ÿ 2 Ÿ IVS

ч 142.3mm x 123.5mm

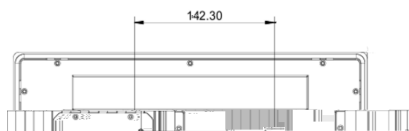

Ÿ 3 Ÿ

h

г

6 #

614#




1	-
2	+

615#XVE#



1	USB VBUS	6	SSRX+
2	USB_P-	7	GND_DRAIN
3	USB_P+	8	SSTX-
4	GND	9	SSTX+
5	SSRX-		

616#



1	MDI0+	5	MDI2+
2	MDI0-	6	MDI2-
3	MDI1+	7	MDI3+
4	MDI1-	8	MDI3-

Oh i#OHG			U l j k#OHG
10 Link	100 Link	1000 Link	Active
Ob	Green	Orange	Green

1	DP_TX 0(p)	11	GND
2	GND	12	DP_TX 3(n)
3	DP_TX 0(n)	13	AUX_EN
4	DP_TX 1(p)	14	DP_conžg
5	GND	15	AUX_CH(p)
6	DP_TX 1(n)	16	GND
7	DP_TX 2(p)	17	AUX_CH(n)
8	GND	18	Hot Plug
9	DP_TX 2(n)	19	GND
10	DP_TX 3(p)	20	DP_PWR

61: #KGPL#

1	HDMIC TX2 DP	11	GND
2	GND	12	HDMIC CLK DN
3	HDMIC TX2 DN	13	NC
4	HDMIC TX1 DP	14	NC
5	GND	15	HDMIC SCL
6	HDMIC TX1 DN	16	HDMIC SCA
7	HDMIC TXO DP	17	GND
8	GND	18	DAC_5V
9	HDMIC TXO DN	19	

61;#

产品中有害物质的名称及含量

